


Pigs

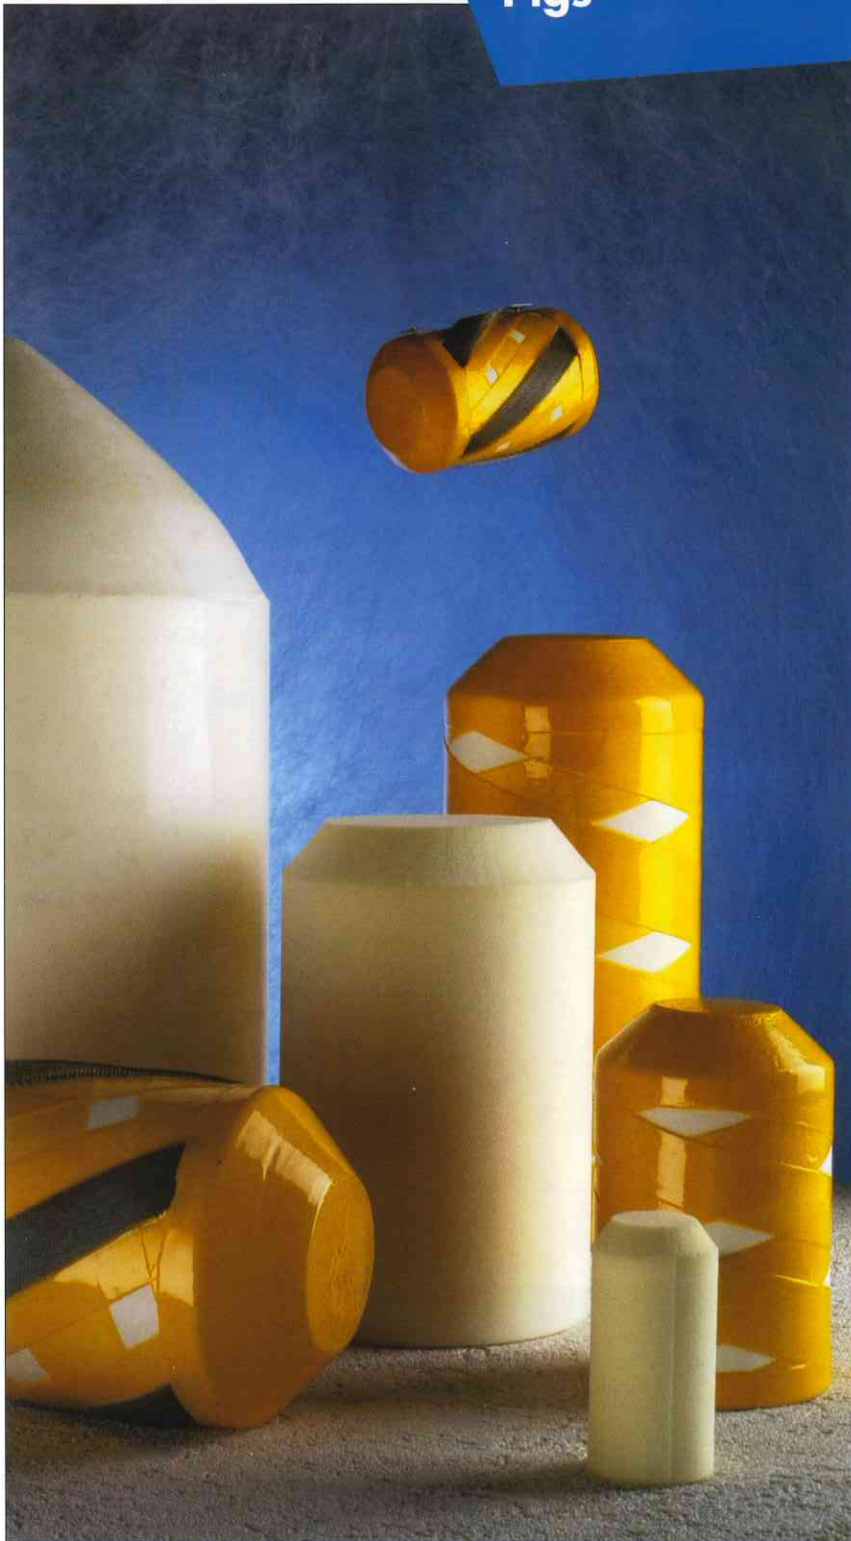

Foam pigs type

- FP
- PU-Plain
- Criss-Cross
- Wire Brush

Description

- SGM Pigs are used for cleaning pipelines during construction, before starting operation and during operation
- Regular pigging ensures an optimal flow and reduces the necessary energy.
- Different types of SGM pigs are available to suit the demands of cleaning pipes of different materials and different degrees of incrusting and pollution
- The SGM delivery range includes pigs from ND 50 to ND 2000. Beside the standard foam pigs we can also offer special executions on request.

**Foam Pig
FP**



Made of soft and very flexible polyurethane foam, reinforced bottom plate

Density: approx 30 kg/m³


Application:

For drying and mild cleaning, suitable for 1,5 D bends

Sizes:

ND 50 - ND 1200

**Foam Pig
PU-Plain**

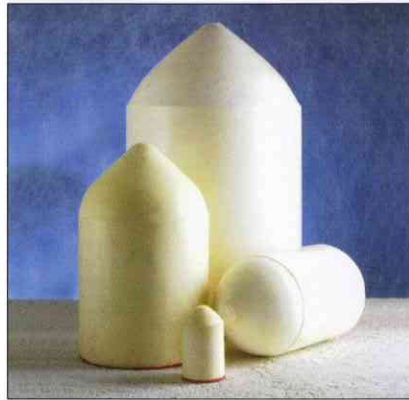

Made of high-density polyurethane foam, reinforced bottom plate, Suitable for 1,5 D bends

Density: 90 – 120 kg/m³

Application:

For mild cleaning and drying, suitable for long runs, and 1,5 D bends

Sizes:

ND 50 - ND 1200

**Foam Pig
PU-CC (Criss Cross)**



Made of high density polyurethane foam, with high quality abrasion resistant stripes of polyurethane wrapped crosswise around the body.

Density: 90 – 120 kg/m³

Application:

For removal of deposits and dewatering, suitable for long runs and 1,5 D bends

Sizes:

ND 50 – ND 1200

**Foam Pig
PU-WB (wire brush)**



Made of high-density polyurethane foam. Coating of high quality abrasion resistant polyurethane and spirally applied steel brushes.

Density: 90 – 120 kg/m³

Application:

Removal of heavy incrustations such as strong corrosion in dry pipes.

Sizes:

ND 50 - 1200

Special versions

Please contact us for special, tailor made solutions