


sgm Sealing Collars

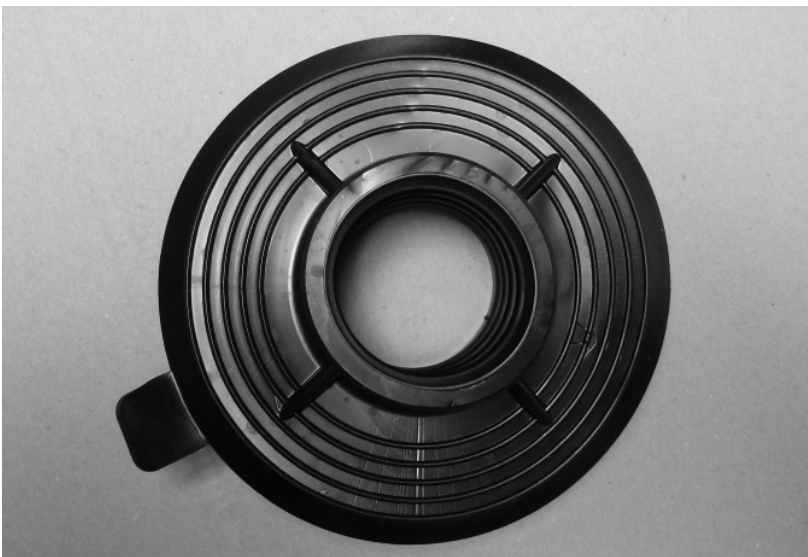

Summary


- sgm Sealing Collars are used when pipes are routed through walls, masonry and ground plates.
- In case of infiltrating water or high groundwater level the Sealing Collars protect the building against penetrating moisture. In enclosed floor pans and swimming pools the Sealing Collars provide protection against escaping water.
- Sealing Collars can be used with plastic, steel, concrete, stoneware and cast iron pipes.
- Material:
TPE / nitrile rubber – plasticized PVC
oilresistant and with KTW certification (drinking water).
- For dimensions DN 25 up to DN 400

Dimensions sgm Sealing Collars

Width for all sizes 60 mm

Type	Art.-no. MK	D1 mm	D2 mm	D3 mm	Tension strip	Art.-no.	Tension strip	Art.-no.
MK 25	2620	25	46	126	40-60	548	40-64	8054
MK 32	2621	32	46	126	40-60	548	40-64	8054
MK 40	2622	40	54	134	40-60	548	40-64	8054
MK 50	2623	50	64	144	50-70	549	52-76	8053
MK 63	2624	63	76	156	60-80	550	59-83	7446
MK 75	2625	75	89	169	70-90	551	71-95	7447
MK 90	2626	90	103	183	90-110	553	91-114	7448
MK 110	2627	110	124	204	110-130	554	105-127	7455
MK 118	9507	118	130	210	120-140	555	117-140	7445
MK 125	2632	125	139	219	120-140	555	117-140	7445
MK 140	2633	140	154	234	140-160	557		
MK 160	2634	160	173	253	160-180	558		
MK 170	9508	170	184	260	180-200	559		
MK 180	2635	180	194	274	180-200	559		
MK 200	2636	200	214	294	200-220	560		
MK 225	2637	225	239	319	220-240	561		
MK 250	2644	250	264	344	250-270	562		
MK 280	2645	280	294	374			280-300	8095
MK 315	2646	315	329	409			321-350	9923
MK 355	2647	355	369	449			346-375	9868
MK 400	2648	400	414	494			410-430	6222

* further sizes in preparation

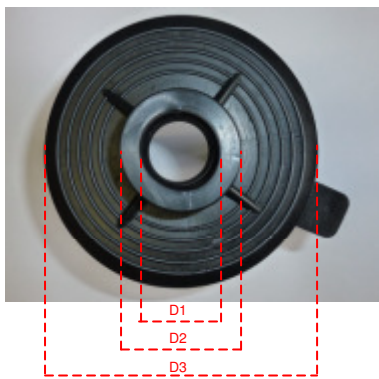

Please note: Sealing collars are no fixing points or pipe supports.